

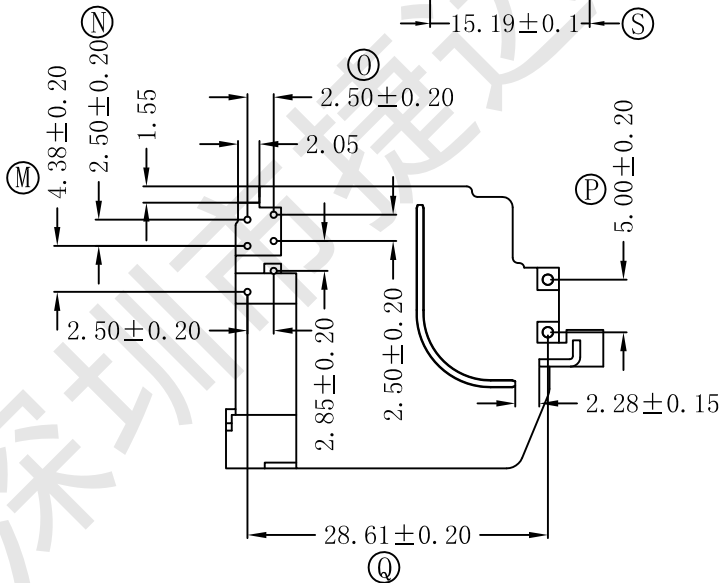
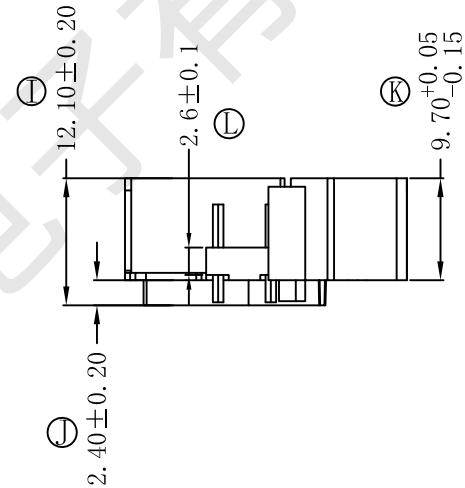
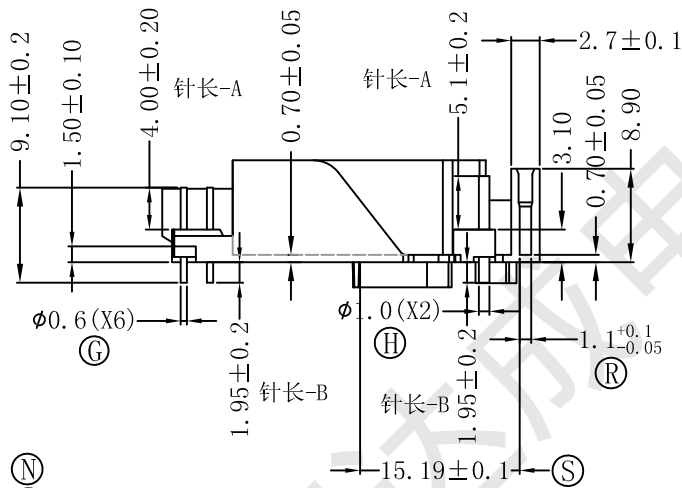
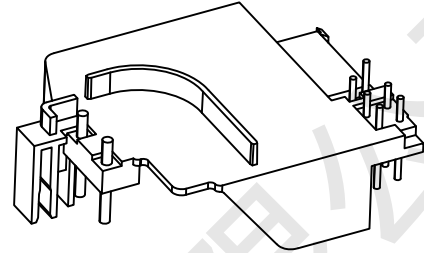


型号

BASE-072

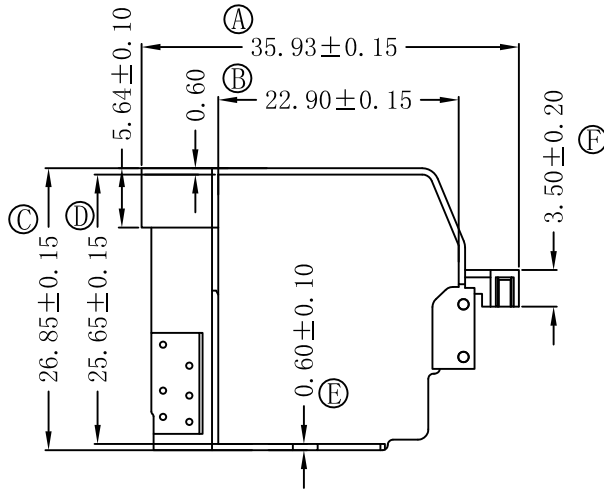

厚度0.7+/-0.05mm

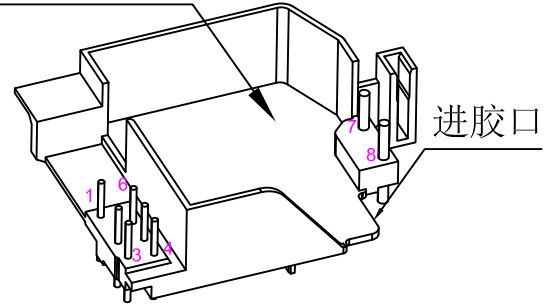

备注:

- 耐压: 4.0KV/1.5mA 3S
- PIN拉力: 焊锡前第1、6脚 ≥ 0.8 (kgf), 第2-5脚 ≥ 1.0 (kgf), 第7-8脚 ≥ 1.0 (kgf)
焊锡后第1、6脚 ≥ 0.8 (kgf), 第2-5脚 ≥ 1.2 (kgf), 第7-8脚 ≥ 1.2 (kgf)
- CP线的镀层要求: 镍层厚度要满足 $1.27\sim 7.6\mu\text{m}$, 锡层要满足 $5\mu\text{m}$ MIN, 过回流焊一次不发黑.
- PIN 可焊性要求如下, (蒸汽老化试验8小时, 温度: $245^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 50倍放大镜下观察, 上锡面积大于等于95%)
- 共面度0.15MAX


REV	DATE	REVISIONS REC

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730

FAX:0755-27317731

ANGLE:
+/-1°UNIT:
MMSCALE:
4/1

MODEL NAME:

BASE-072

量产模

UL REC:

UL 94V-0

PIN TENSION LOAD:

DATE:
2021-11-22

BOBBIN MATERIAL:

LCP-E4008

PIN MATERIAL:

DRAWING NO:

BASE-072

REV:

1.0

DRAFTER

L.R.J

TOLERANCE

0<L<4 ±0.1

4<L<16 ±0.2

16<L<50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.