
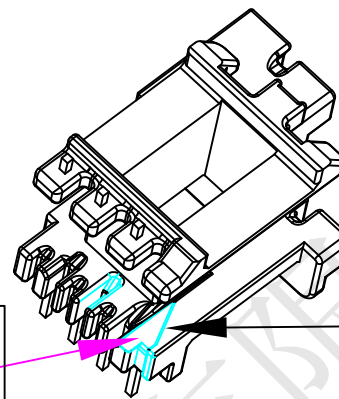








型号

EE-1940-1

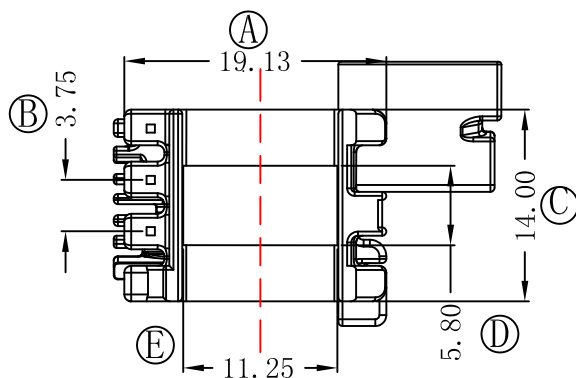

第4脚顶部减胶
0.4MM, 针孔上的
肉厚相应变小,
按0.4^{+0.3}₀管控

①
4脚边过线槽修改,
2-3脚间线槽加深
1.0mm

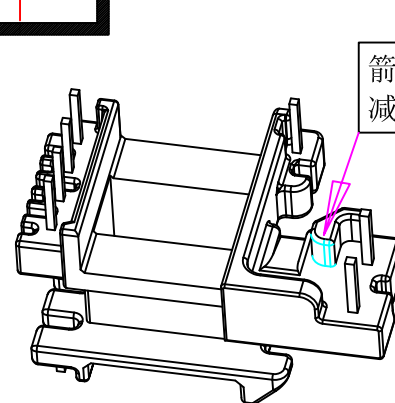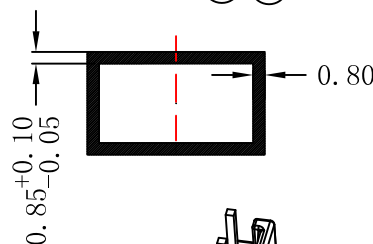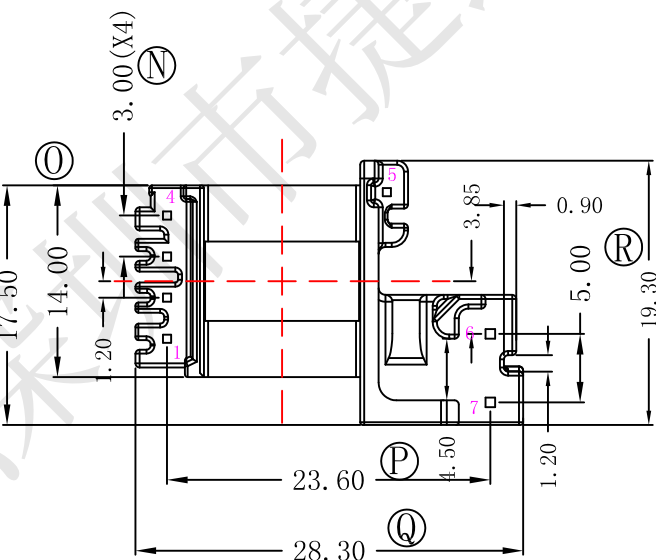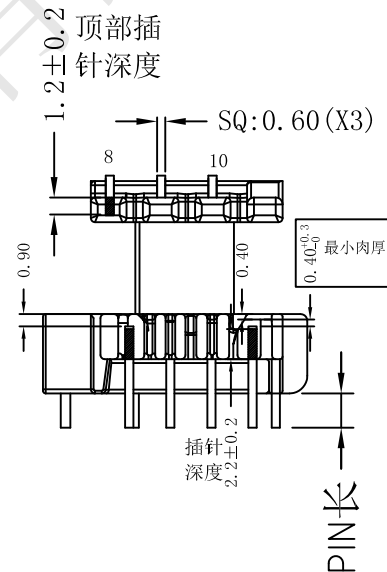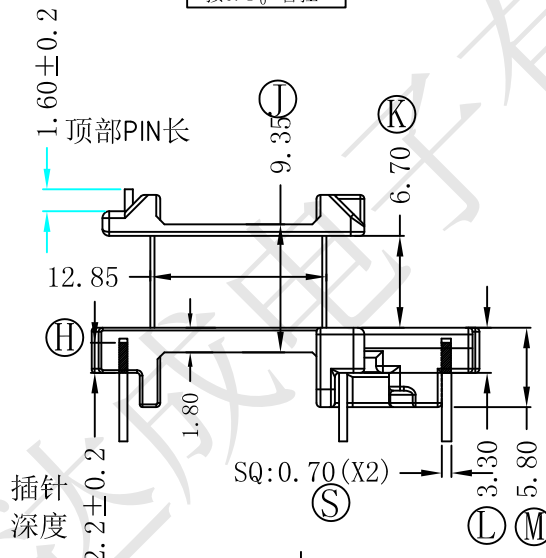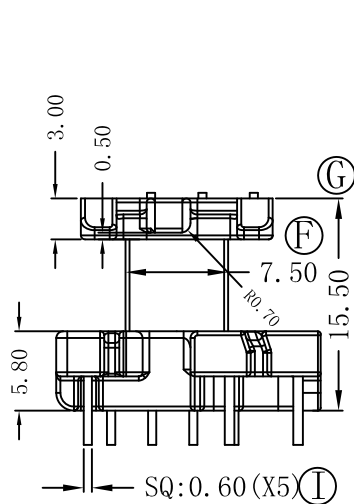

②
箭头处□
减胶1.65

REV	DATE	REVISIONS REC
1	21-9-2	图中第1.2点修改, 顶部针长改为1.6MM, 版本升为1.2

深圳市捷达成电子有限公司


SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730 FAX:0755-27317731

ANGLE:
+/-1°

UNIT:
MM

SCALE:
4/1



MODEL NAME:
EE-1940-1 4+3+3PIN

UL REC:
UL 94V-0

PIN TENSION LOAD:
1.5KG MIN

DATE:
2021-09-02

BOBBIN MATERIAL:
PM-9823

PIN MATERIAL:
CP WIRE

DRAWING NO:
EE-19

REV:
1.2

DRAFTER

L.R.J

TOLERANCE

0<L<4 ±0.1

4<L<16 ±0.2

16<L<50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.