

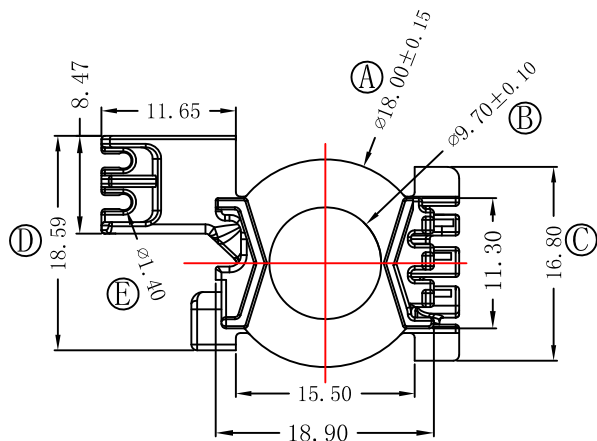


型号



PQ-2229

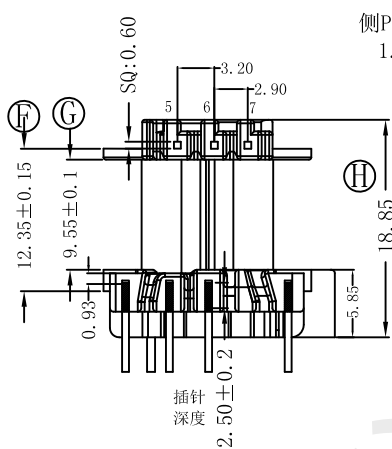


①
此支点加胶0.5MM,
并加长与外面平齐

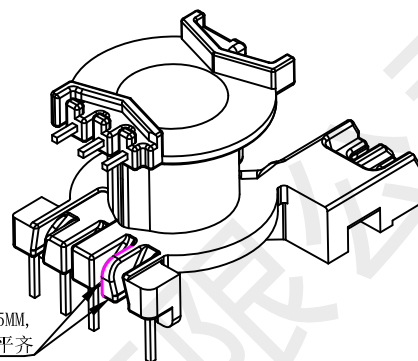



侧PIN长(外露)
 1.70 ± 0.2

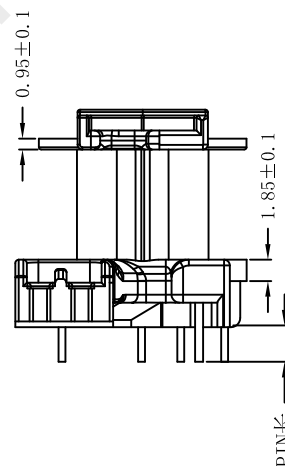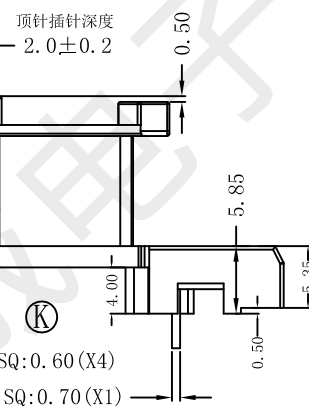

PIN长

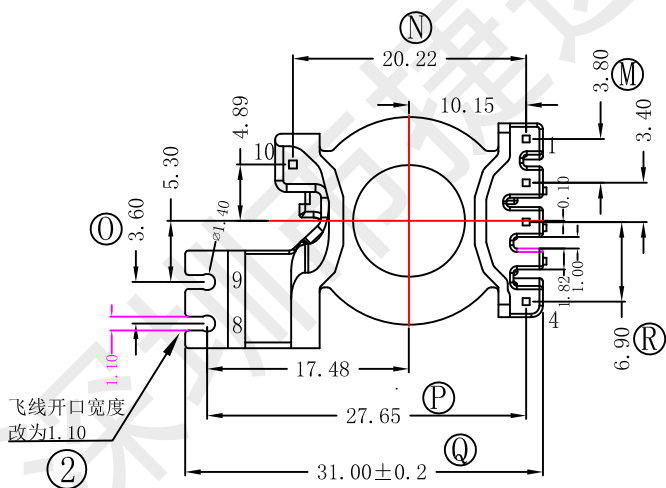

飞线开口宽度
改为1.10

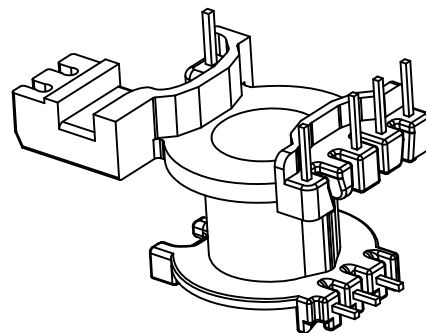

REV	DATE	REVISIONS REC
1	23-10-11	第3-4脚中间支点加厚0.5mm, 并加长与外面平齐
2	23-11-21	飞线孔开口宽度1.2改为1.10

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730

FAX:0755-27317731

ANGLE:

 $\pm 1^\circ$

MODEL NAME:

PQ-2229 4+1+3PIN

UNIT:

MM

UL REC:

UL 94V-0

BOBBIN MATERIAL:

PM-9630

SCALE:

4/1

PIN TENSION LOAD:

2.0KG MIN

PIN MATERIAL:

CP WIRE

DRAFTER


L.R.J

TOLERANCE

 $0 < L < 4 \quad \pm 0.1$ $4 < L < 16 \quad \pm 0.2$ $16 < L < 50 \quad \pm 0.3$ PIN PITCH ± 0.2

CHECKER

Y.F.



DATE:

2023-11-21

DRAWING NO:

PQ-22

REV:

1.0