
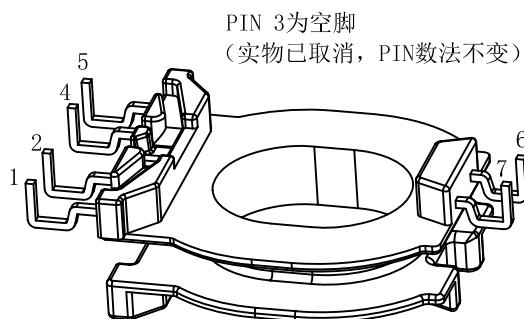
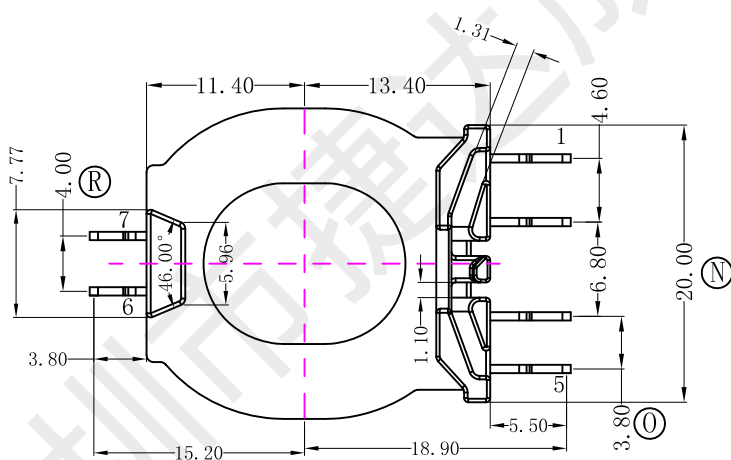
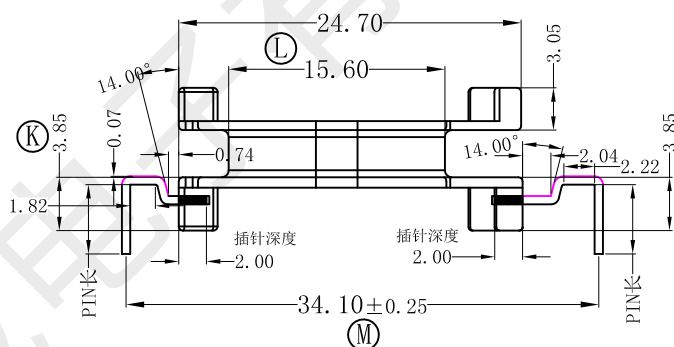
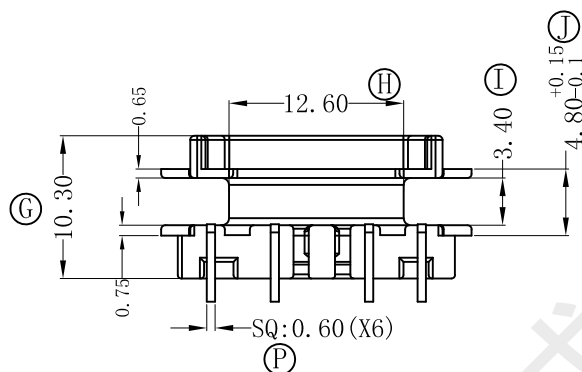
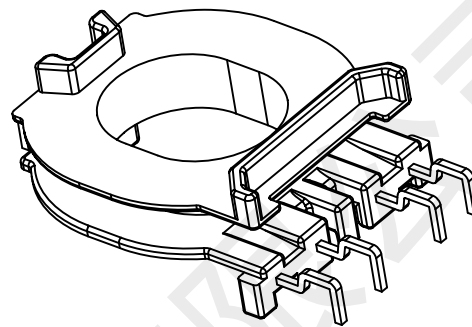


型号

ATQ-2711

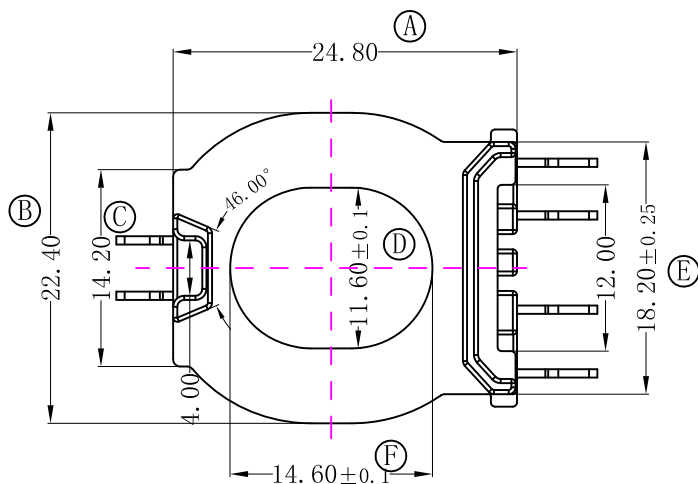

备注:


1. 耐压: 4.0KV/1.5mA 60S
2. 焊锡温度: 450° ±10° 3SEC
3. 焊锡前拉力: 1.0KG Min, 焊锡后: 1.5KG Min
4. 任意点强度: 1.5KG Min
5. PIN来回45° 弯折一次无折断, 龟裂
6. 六个PIN折弯处在同一水平面

REV	DATE	REVISIONS REC
1	23-12-12	次级改为两根PIN, PIN径改为方针0.6, 槽位移动

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730 FAX:0755-27317731

ANGLE:
+/-1°UNIT:
MMSCALE:
4/1

MODEL NAME:

ATQ-2711 4+2PIN

UL REC:

UL 94V-0

PIN TENSION LOAD:

1.0KG MIN

DATE:

2023-12-06

BOBBIN MATERIAL:

PHENOLIC

PIN MATERIAL:

CP WIRE

DRAWING NO:

ATQ-27

REV:

1.1

DRAFTER

L.R.J

TOLERANCE

0<L<4 ±0.1

4<L<16 ±0.2

16<L<50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.