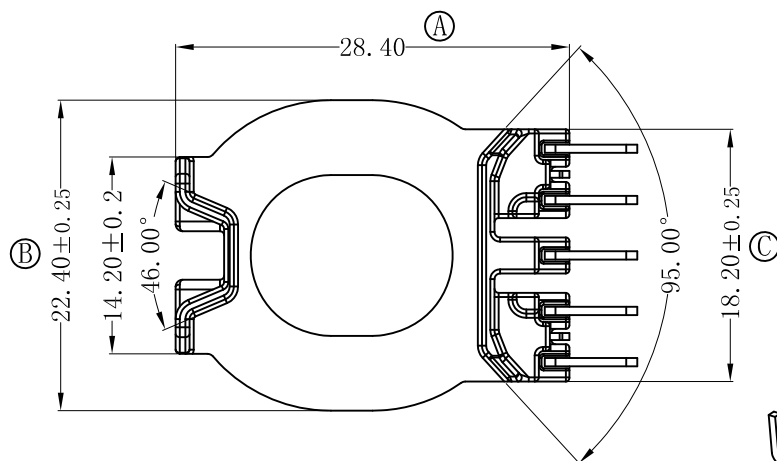
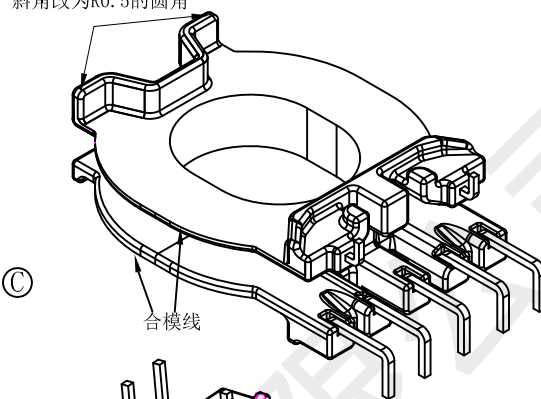
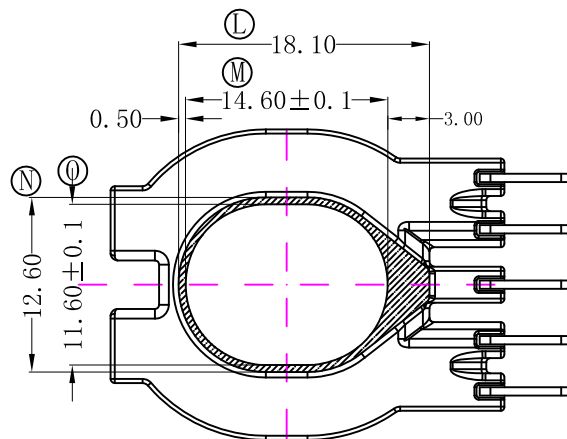
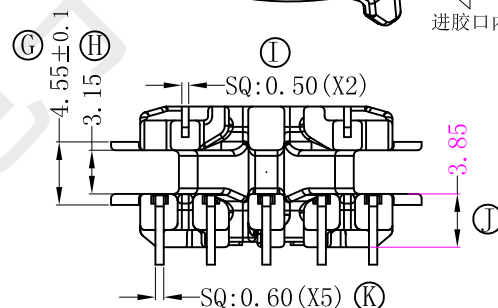
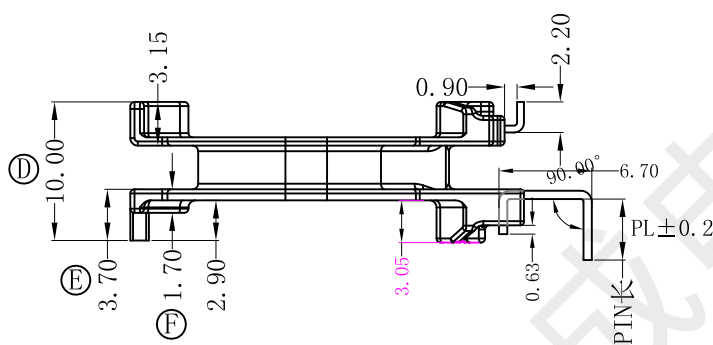
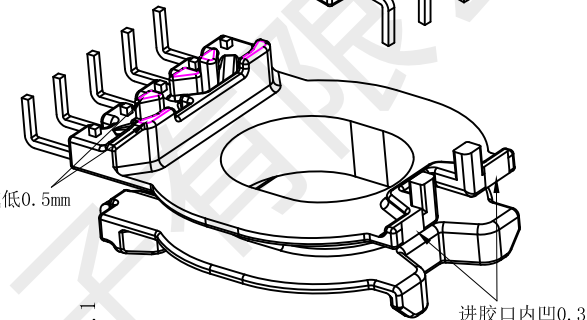


型号

ATQ-2712

①
斜角改为R0.5的圆角②
凸点及挡板减低0.5mm

备注：样品模

1. 耐压：4.0KV/1.5mA 60S
2. 焊锡温度：450° ±10° 3SEC
3. 焊锡前拉力：1.0KG Min，焊锡后：1.5KG Min
4. 任意点强度：1.5KG Min
5. PIN来回45° 弯折一次无折断，龟裂
6. 与ATQ-2712-1匹配OK


REV	DATE	REVISIONS REC
1	23-11-27	右上图中1.2两点修改，版本升为1.1

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730

FAX:0755-27317731

ANGLE:
+/-1°UNIT:
MMSCALE:
4/1

MODEL NAME:

ATQ-2712 5+2PIN

UL REC:

UL 94V-0

PIN TENSION LOAD:

1.0KG MIN

DATE:

2023-11-27

BOBBIN MATERIAL:

PM-9630

PIN MATERIAL:

CP WIRE

DRAWING NO:

ATQ-27

REV:

1.1

DRAFTER

L.R.J

TOLERANCE

0<L<4 ±0.1

4<L<16 ±0.2

16<L<50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.