

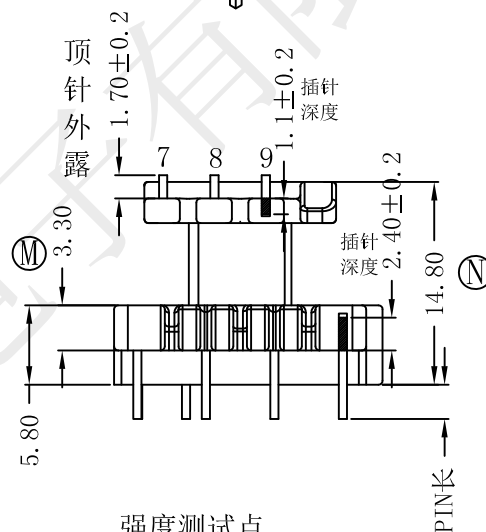
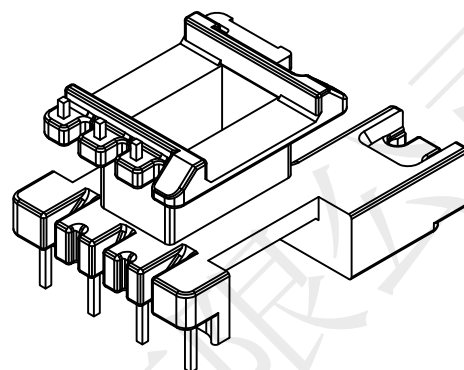
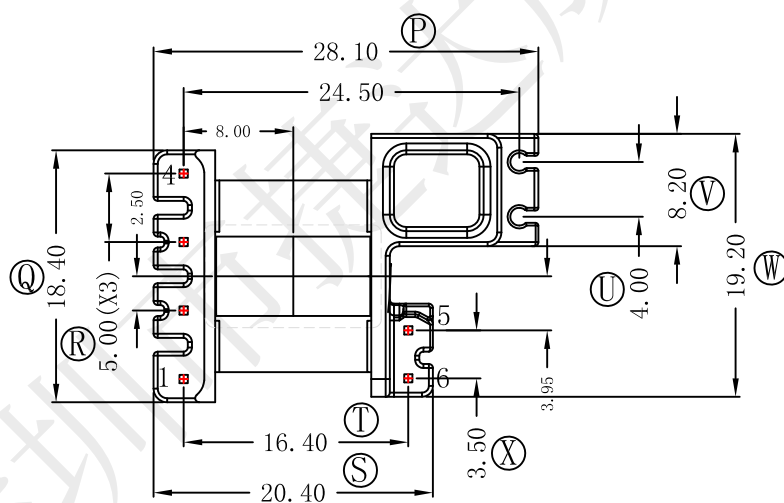
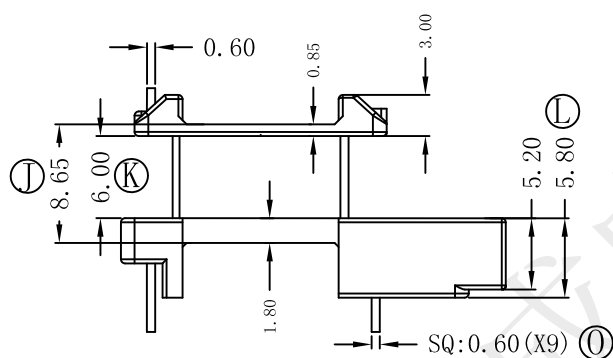


型号

EE-1947

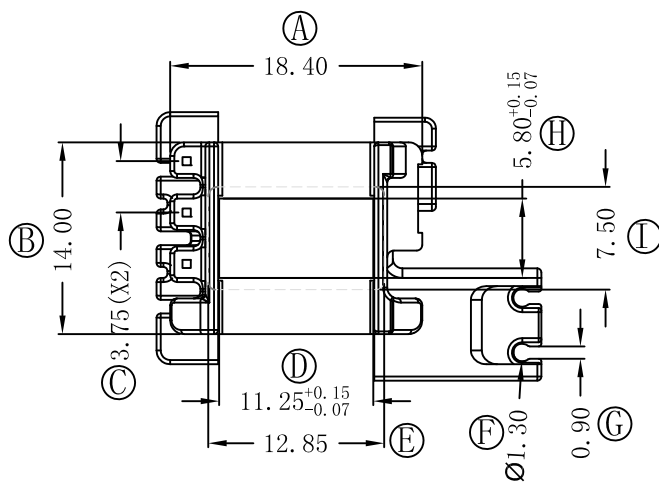

强度测试点

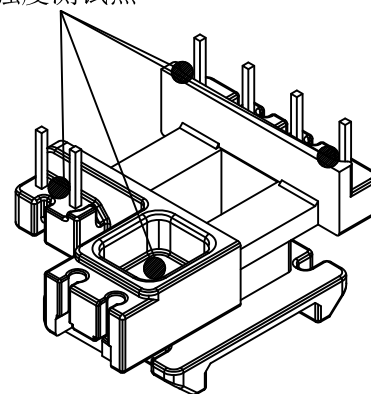

备注:

1: 拉力要求:

焊前-PIN(1-6) 2.0KG/MIN, PIN(7-9) 0.8KG/MIN

焊后-PIN(1-6) 2.5KG/MIN, PIN(7-9) 1.0KG/MIN

2: 强度要求: 2.5KG/MIN

3: 耐压要求: 4.0kv/1.0mA/60S


REV	DATE	REVISIONS REC

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730

FAX:0755-27317731

ANGLE:
+/-1°UNIT:
MMSCALE:
4/1MODEL NAME:
EE-1947 4+2+3PINUL REC:
UL 94V-0PIN TENSION LOAD:
2.0KG MINDATE:
2024-01-08BOBBIN MATERIAL:
PM-9823PIN MATERIAL:
CP WIREDRAWING NO:
EE-19REV:
1.0

DRAFTER

L.R.J

CHECKER

Y.F.

TOLERANCE

0<L<4 ±0.1

4<L<16 ±0.2

16<L<50 ±0.3

PIN PITCH ±0.2