


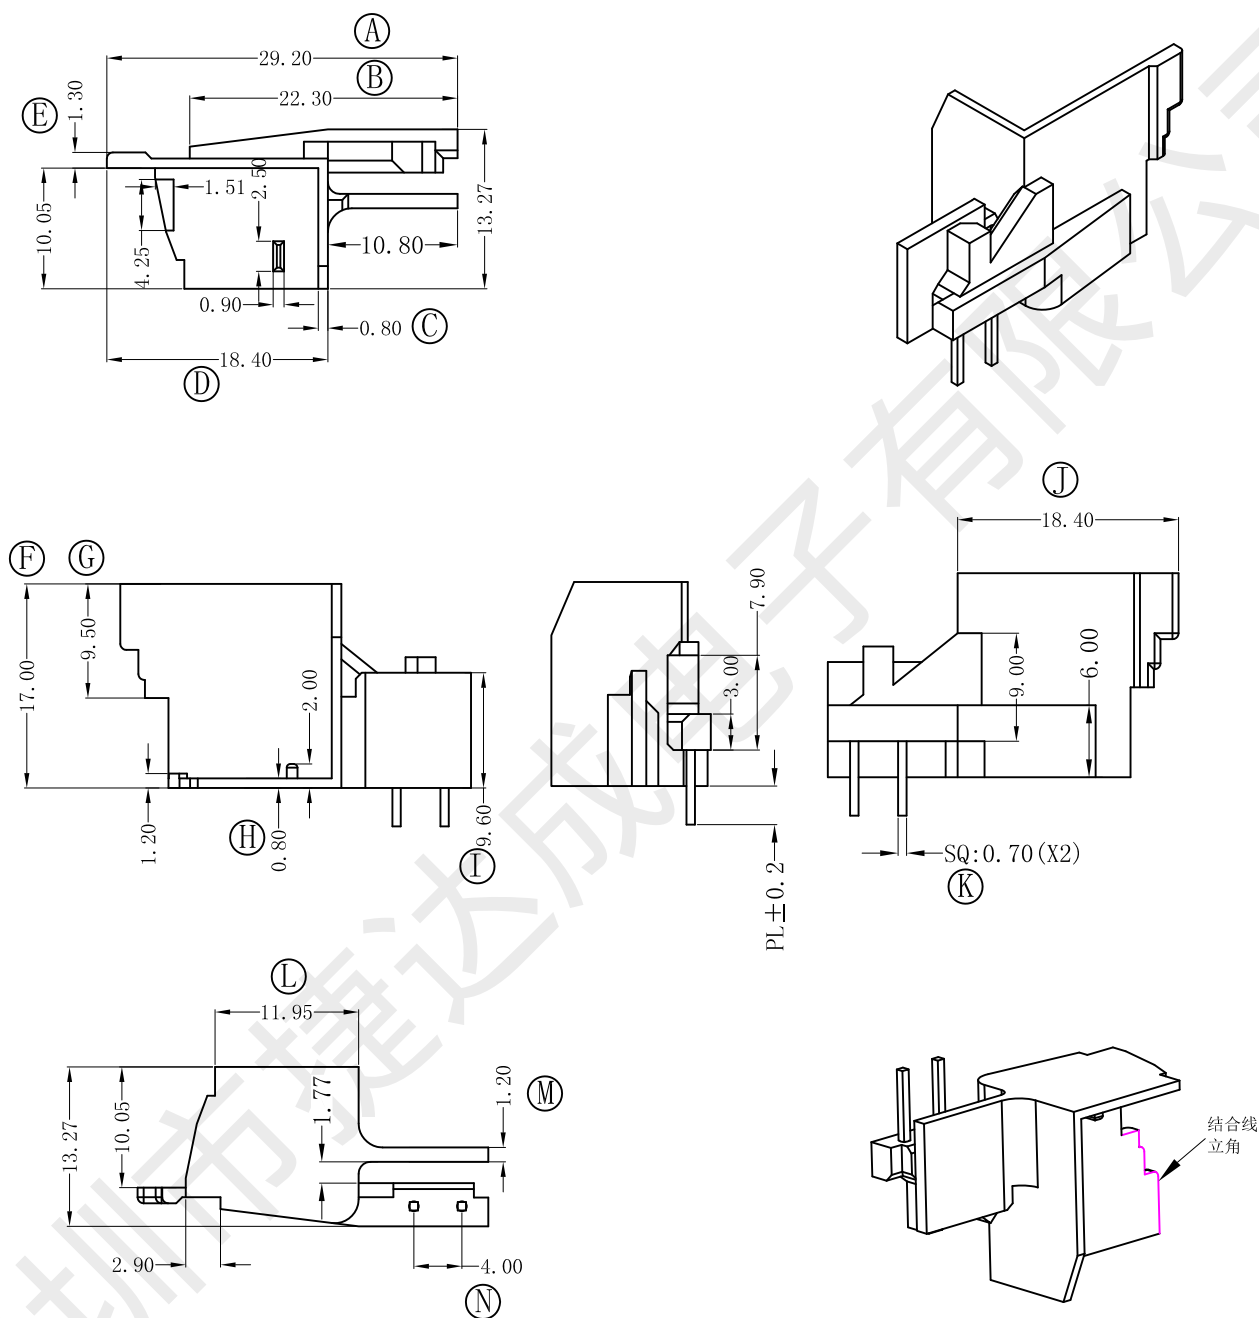

- 备注:
1. 耐压:4.0KV/1.0mA 60S
 2. 焊锡温度: 450° ±10° 3SEC
 3. 焊锡前拉力: 1.2KG Min, 焊锡后: 1.5KG Min
 4. 任意点强度:1.5KG Min
 5. PIN来回90° 弯折一次无折断, 龟裂
 6. 模具状况: 样品模

REV	DATE	REVISIONS REC

深圳市捷达成电子有限公司 SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD. TEL:0755-27317730 FAX:0755-27317731			ANGLE: +/-1°		MODEL NAME: ATQ-2321-1 2PIN	
			UNIT: MM	UL REC: UL 94V-0	BOBBIN MATERIAL: PM-9630	
DRAFTER	L.R.J	TOLERANCE 0<L<4 ±0.1 4<L<16 ±0.2 16<L<50 ±0.3 PIN PITCH ±0.2	SCALE: 4/1	PIN TENSION LOAD: 1.0KG MIN	PIN MATERIAL: CP WIRE	
CHECKER	Y.F.			DATE: 2024-05-14	DRAWING NO: ATQ-23 COVER	REV: 1.0