


型号

ATQ-2321

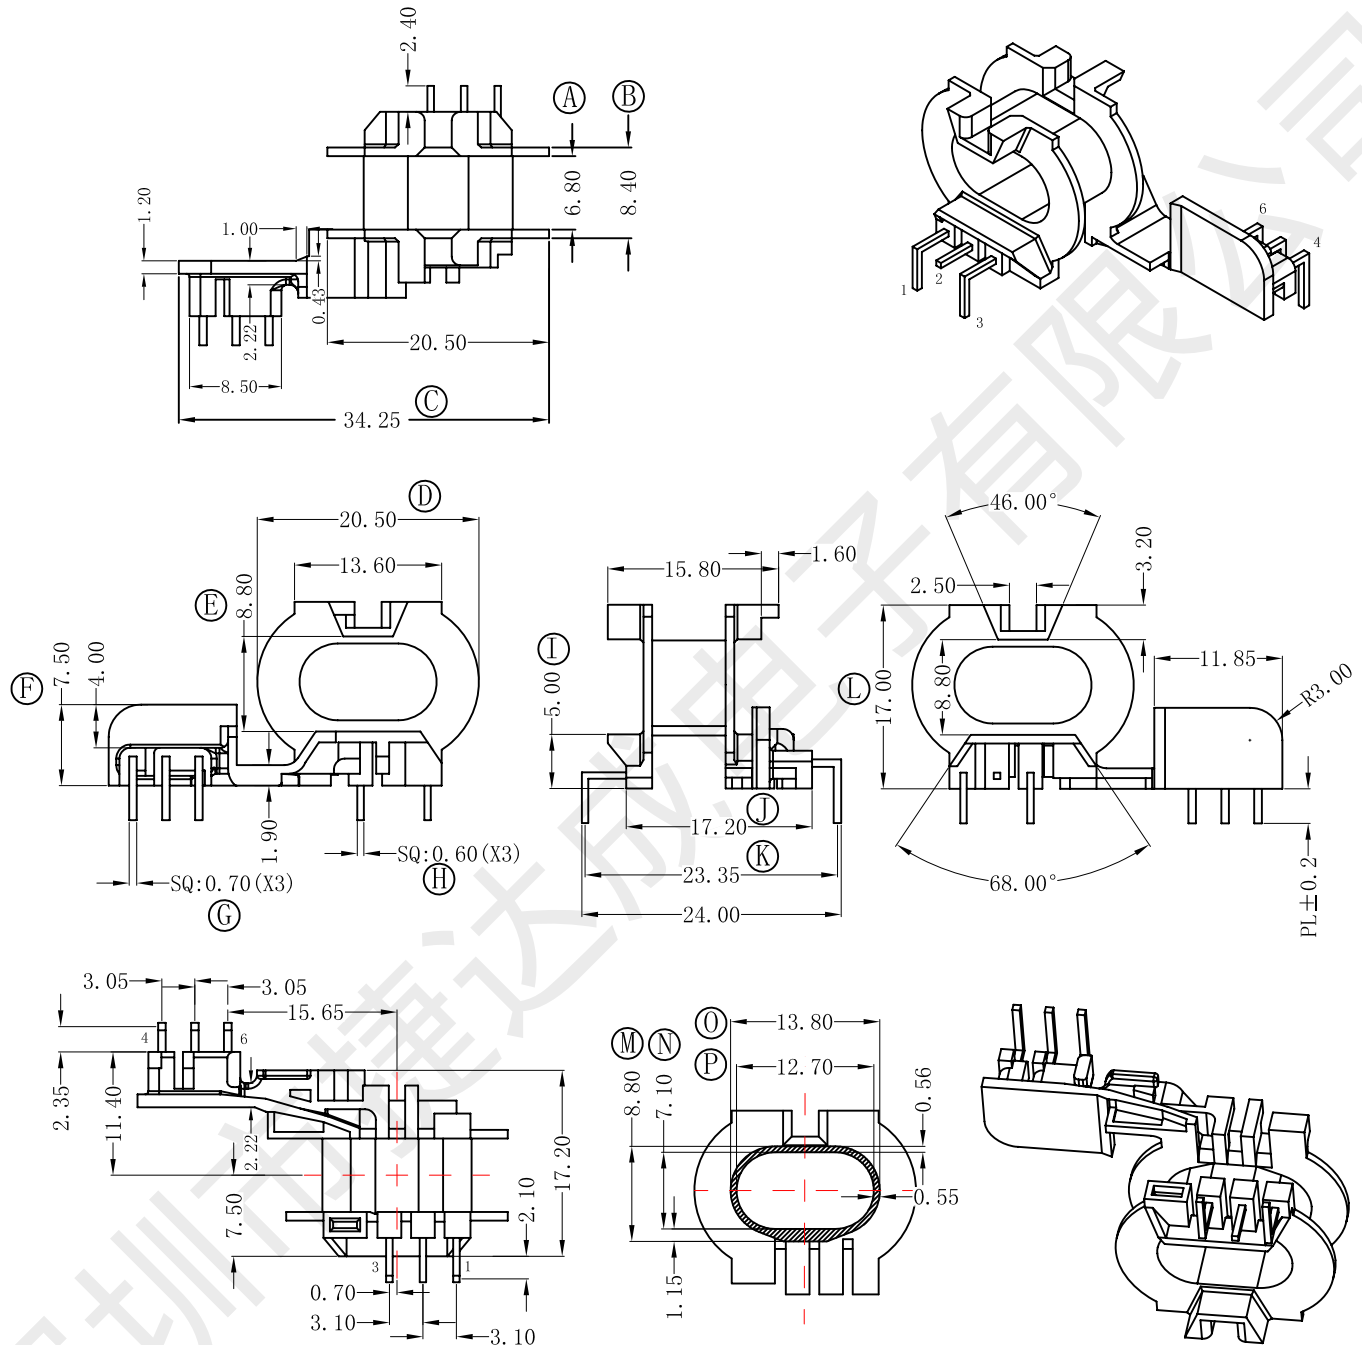

备注:

1. 耐压: 4.0KV/1.0mA 60S
2. 焊锡温度: 450° ± 10° 3SEC
3. 焊锡前拉力: 1.2KG Min, 焊锡后: 1.5KG Min
4. 任意点强度: 1.5KG Min
5. PIN来回45° 弯折一次无折断, 龟裂
6. 模具状况: 样品模


REV	DATE	REVISIONS REC

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730

FAX:0755-27317731

ANGLE:
+/-1°UNIT:
MMSCALE:
4/1

MODEL NAME:

ATQ-2321 3+3PIN

UL REC:

UL 94V-0

PIN TENSION LOAD:

1.2KG MIN

DATE:

2024-05-14

BOBBIN MATERIAL:

PM-9630

PIN MATERIAL:

CP WIRE

DRAWING NO:

ATQ-23

REV:

1.0

DRAFTER

L.R.J

TOLERANCE

0<L<4 ±0.1

4<L<16 ±0.2

16<L<50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.