


型号

EE-1949

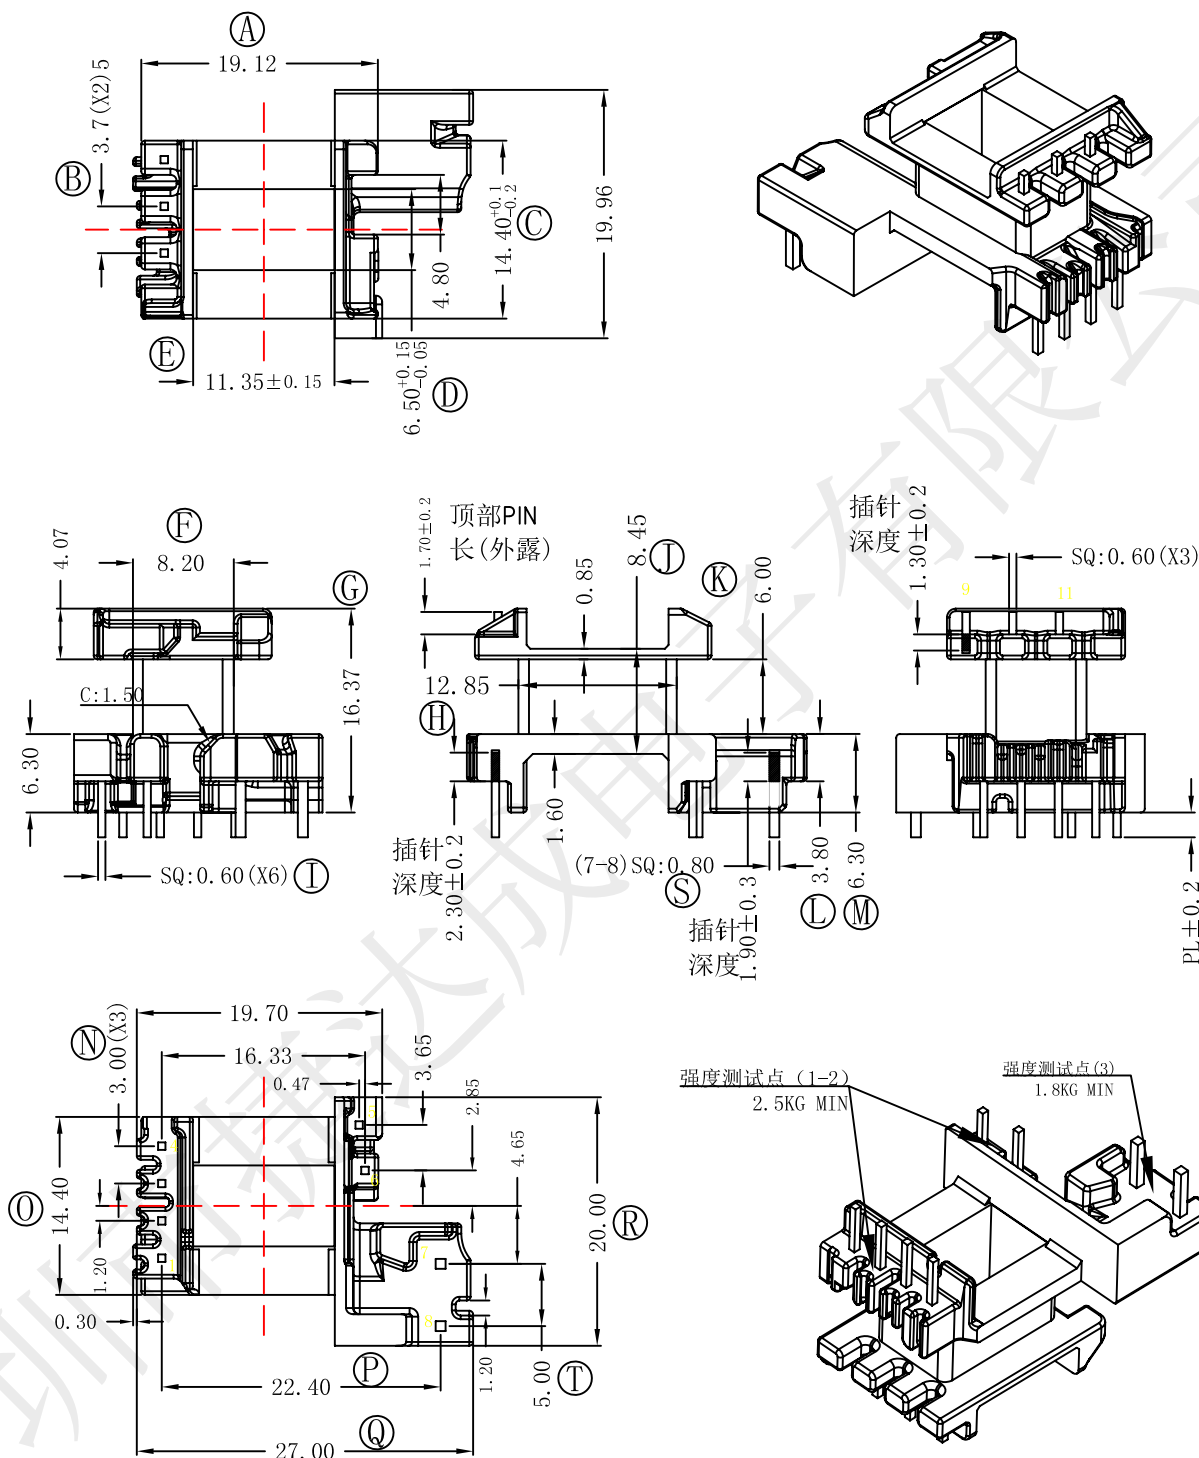

备注:

- 1: 拉力要求: (1-8)焊前2.0KG/MIN, 焊后2.5KG/MIN.
(9-11)焊前1.0KG/MIN, 焊后1.5KG/MIN.
- 2: 强度要求: 任意点1.80KG/MIN
- 3: 耐压要求: 4.2kv/0.5mA/60S

REV	DATE	REVISIONS REC

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730

FAX:0755-27317731

ANGLE:

 $\pm 1^\circ$

MODEL NAME:

EE-1949

4+4+3PIN

UNIT:

MM

UL REC:

UL 94V-0

BOBBIN MATERIAL:

PM-9823

SCALE:

4/1

PIN TENSION LOAD:

2.0KG MIN

PIN MATERIAL:

CP WIRE

DRAFTER

L.R.J

TOLERANCE

0<L<4 ±0.1


4<L<16 ±0.2

16<L<50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.



DATE:

2024-12-06

DRAWING NO:

EE-19

REV:

1.0