
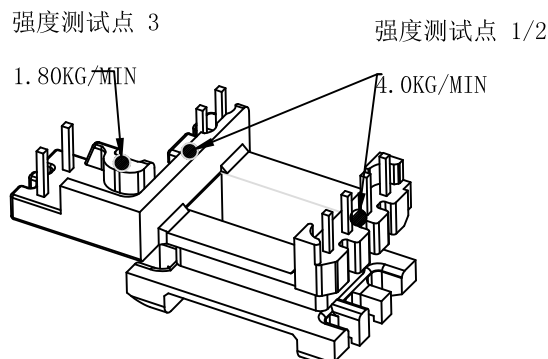
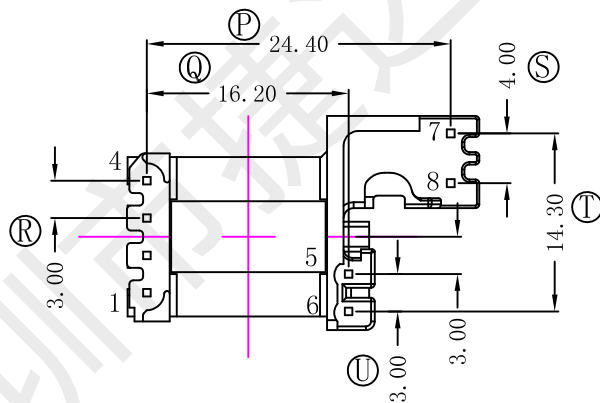
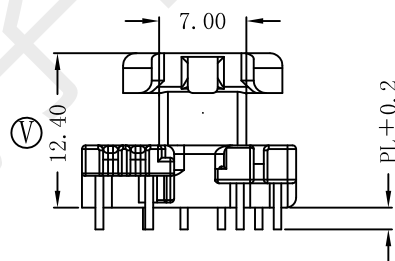
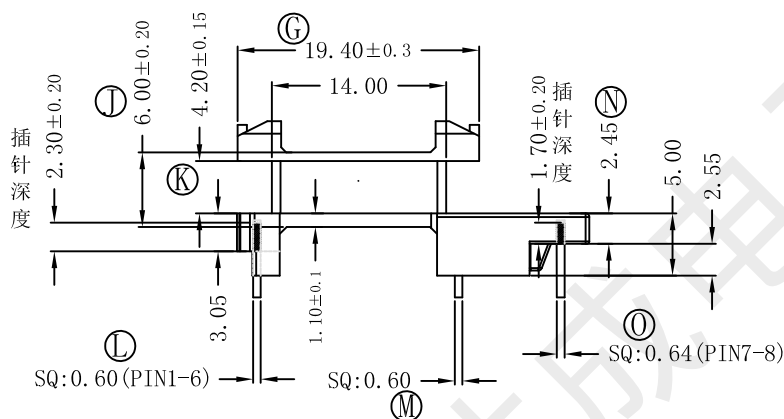
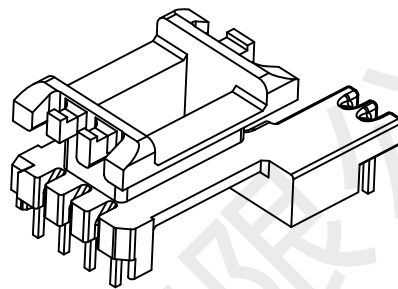


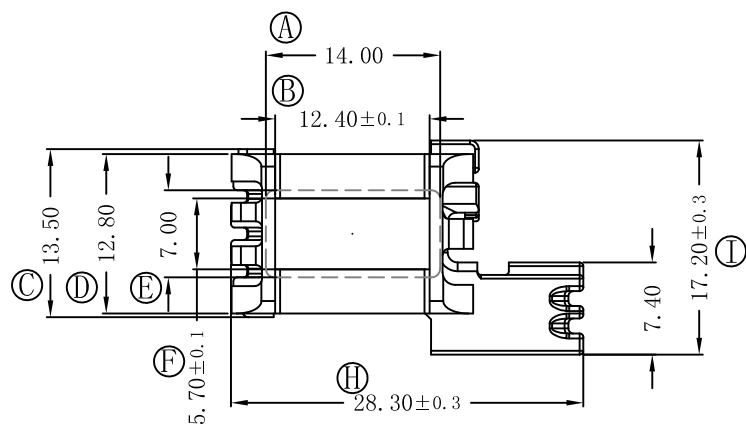

备注:

- 1: 拉力要求: 焊前2.0KG/MIN, 焊后2.5KG/MIN.
- 2: 耐压要求: 4.0kv/0.5mA/5S
- 3: 未标公差尺寸按图框标准公差执行
- 4: 未标序尺寸为参考尺寸, 不做进料管控
- 5: 合模线段差标准: $\leq 0.07\text{mm}$
- 6: 绕线槽/壁厚/叶片厚度 ± 0.1
- 7: 刻字高度0.07mm以内, 图纸尺寸不包括字高
- 8: 底部支点平贴度0.3mm Max

REV	DATE	REVISIONS REC

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730


FAX:0755-27317731

ANGLE: $+/-1^\circ$

UNIT: MM

SCALE:

4/1



MODEL NAME: EE-1950 4+2+2PIN

UL REC:
UL 94V-0

PIN TENSION LOAD:
2.0KG MIN

DATE: 2024-12-06

BOBBIN MATERIAL:
PM-9823

PIN MATERIAL: CP WIRE

DRAWING NO:
EE-19

REV:	1.0
------	-----

DRAFTER

L.R.J

TOLERANCE

 $0 < L < 4 \quad \pm 0.1$ $4 < L < 16 \quad \pm 0.2$

16<L<50 ±0.3

PIN PITCH ± 0.2 **CHECKER**

Y.F.