
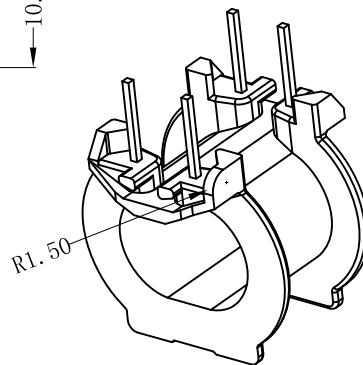
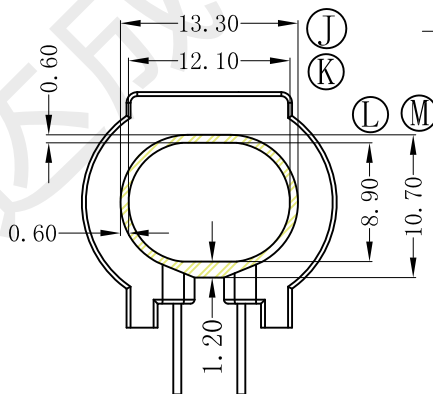
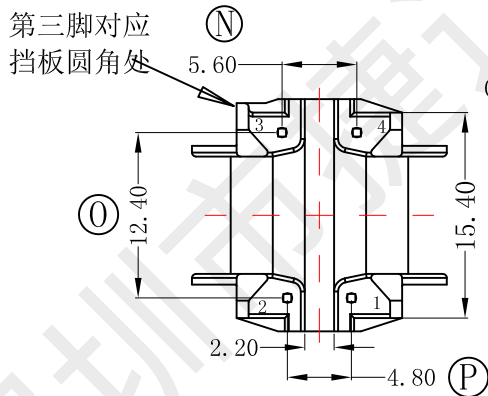
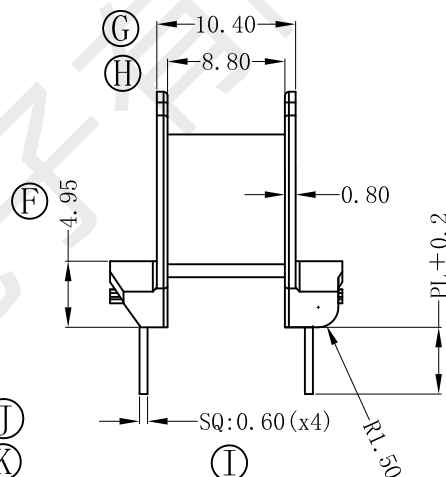
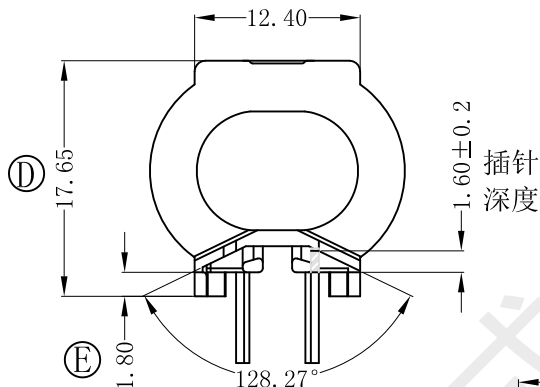
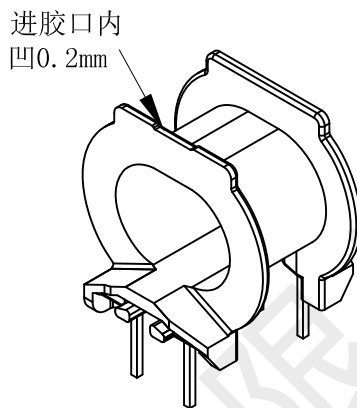


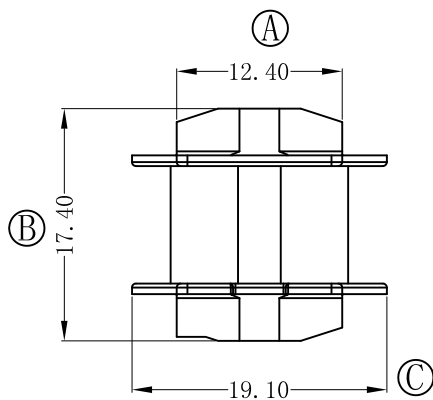

- 备注:
1. 耐压:4.0KV/1.0mA 60S
 2. 焊锡温度: 450° ±10° 3SEC
 3. 焊锡后: 1.5KG Min
 4. 任意点强度:1.5KG Min
 5. PIN来回90° 弯折一次无折断, 龟裂
 6. 模具状况: 样品模

REV	DATE	REVISIONS REC


深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.
TEL:0755-27317730 FAX:0755-27317731

ANGLE:
+/-1°

UNIT:
MM

SCALE:
4/1



MODEL NAME:
ATQ-2232 2+2PIN

UL REC:
UL 94V-0

PIN TENSION LOAD:
1.0KG MIN

DATE:
2024-09-30

BOBBIN MATERIAL:
PM-9630

PIN MATERIAL:
CP WIRE

DRAWING NO:
ATQ-22

REV:
1.0

DRAFTER

L.R.J

CHECKER

Y.F.

TOLERANCE

0<L<4 ±0.1
4<L<16 ±0.2
16<L<50 ±0.3
PIN PITCH ±0.2