
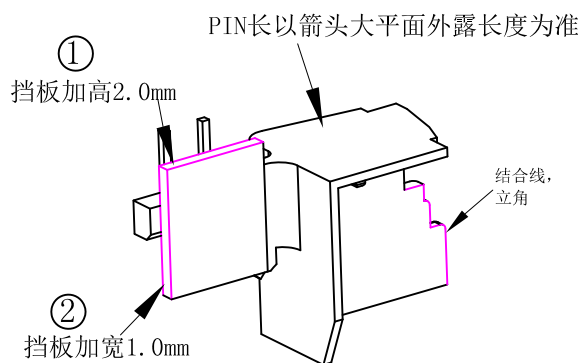
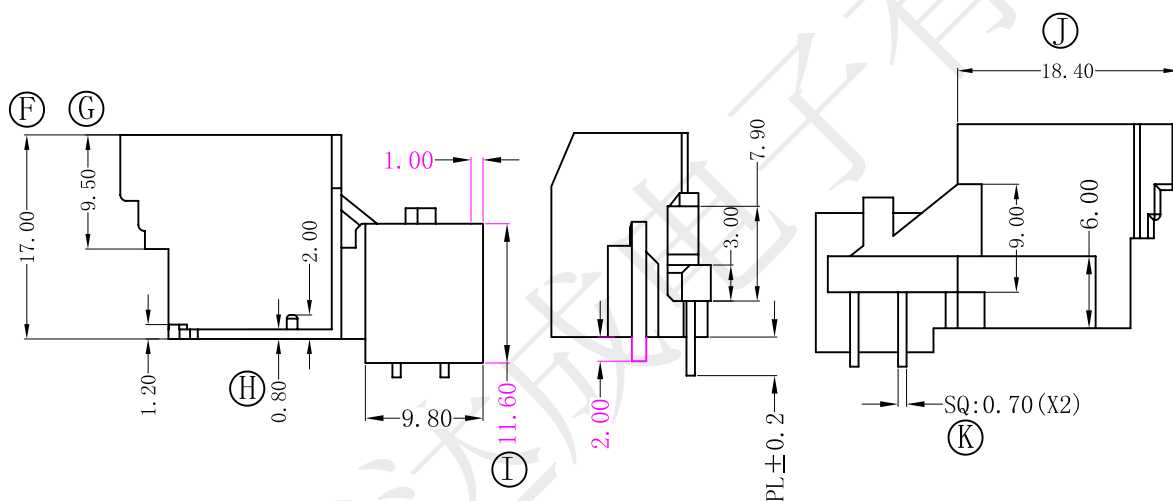



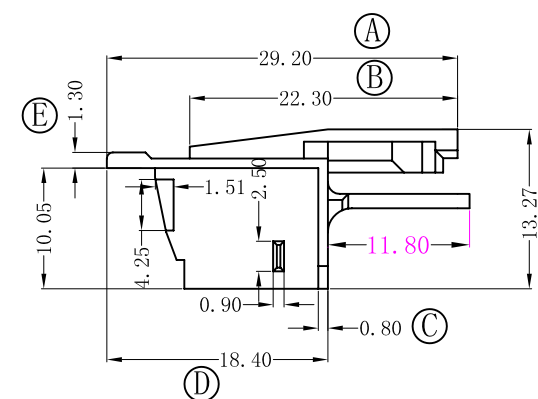

备注:


1. 耐压: 4.0KV/1.0mA 60S
2. 焊锡温度: 450° ± 10° 3SEC
3. 焊锡前拉力: 1.2KG Min, 焊锡后: 1.5KG Min
4. 任意点强度: 1.5KG Min
5. PIN来回90°弯折一次无折断, 龟裂
6. 模具状况: 样品模

REV	DATE	REVISIONS REC
1	24-08-06	挡板加高2.0, 加宽1.0mm

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730 FAX:0755-27317731

ANGLE:
+/-1°UNIT:
MMSCALE:
4/1MODEL NAME:
ATQ-2322-1 2PINUL REC:
UL 94V-0PIN TENSION LOAD:
1.0KG MINDATE:
2024-08-06BOBBIN MATERIAL:
PM-9630PIN MATERIAL:
CP WIREDRAWING NO:
ATQ-23 COVERREV:
1.0

DRAFTER

L.R.J

TOLERANCE

0<L<4 ±0.1

4<L<16 ±0.2

16<L<50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.