


型号

EQ-2059

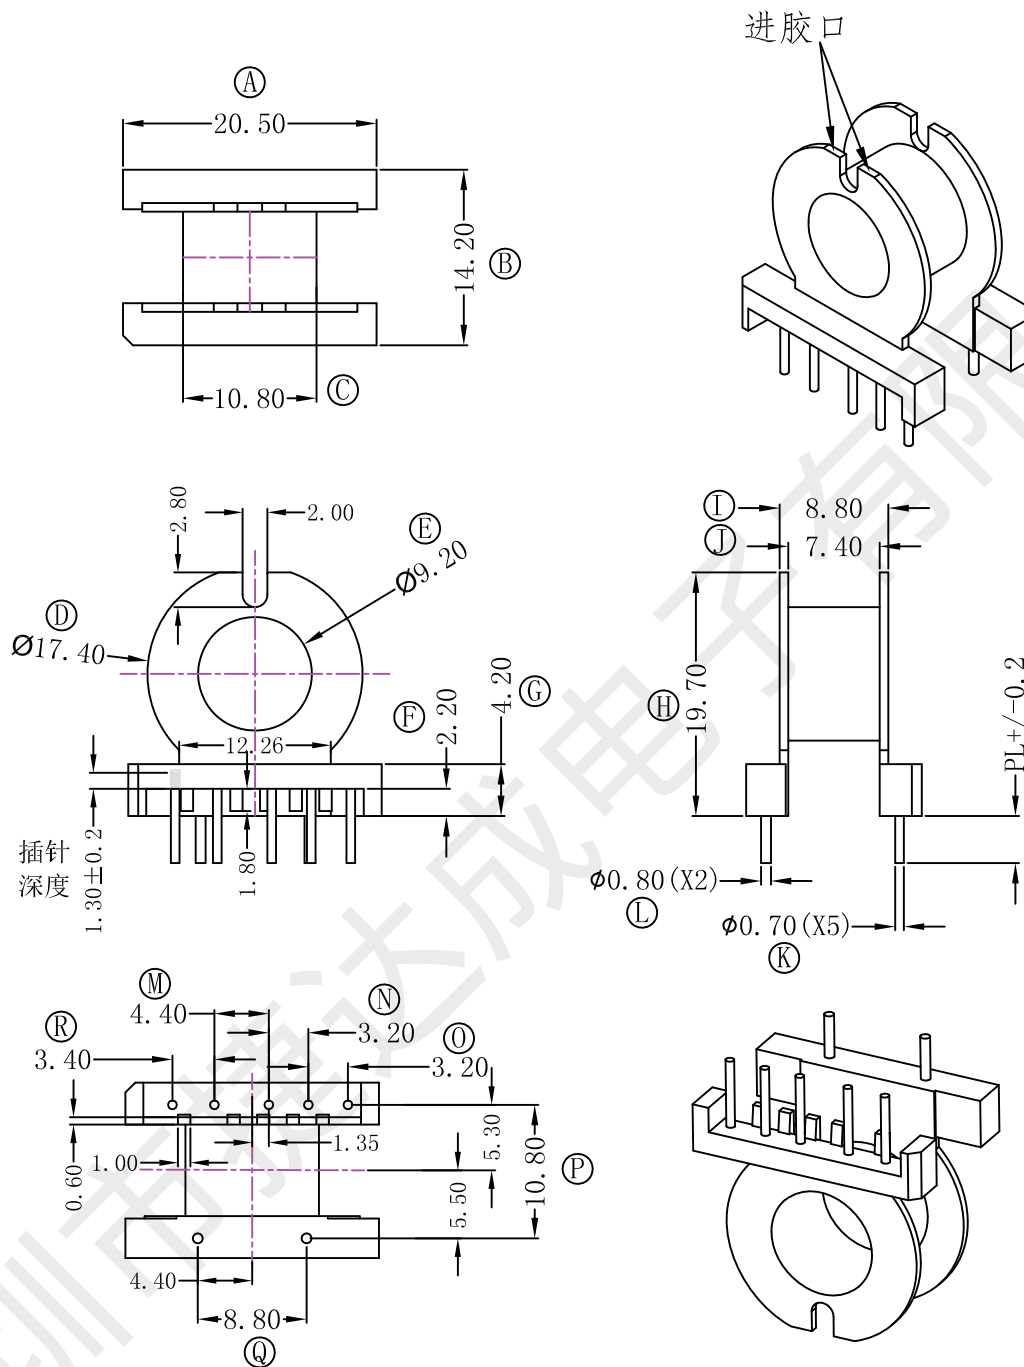

备注：样品模

1. 耐压：4.0KV/1.5mA 60S;
2. 焊锡温度：450° ±10° 3SEC;
3. PIN来回90° 弯折一次无折断，龟裂;
4. 焊锡前拉力：1.0KG Min，焊锡后：1.5KG Min;
5. 任意点强度：1.8KG Min;


| REV | DATE | REVISIONS REC |
|-----|------|---------------|
| 1   |      |               |
|     |      |               |
|     |      |               |
|     |      |               |

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730

FAX:0755-27317731

ANGLE:  
+/-1°UNIT:  
MMSCALE:  
4/1

MODEL NAME:

EQ-2059 5+2PIN

UL REC:

UL 94V-0

PIN TENSION LOAD:

1.0KG MIN

DATE:

2024-08-30

BOBBIN MATERIAL:

PM-9630

PIN MATERIAL:

CP WIRE

DRAWING NO:

EQ-20

REV:

1.0

DRAFTER

L.R.J

TOLERANCE

0&lt;L&lt;4 ±0.1

4&lt;L&lt;16 ±0.2

16&lt;L&lt;50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.