


型号

EI-4801


EI-4801端子





1、PIN针材质:黄铜H65镀锡
2、打扁凸出高度为0.1MM

T=0.5



PIN针弯折角度实验






1. 所有弯折成型角均需做折弯强度实验
实验方法如下:由90°折为180°,再由180°折为90° 无断裂不良(每个部位至少3次来回弯折)

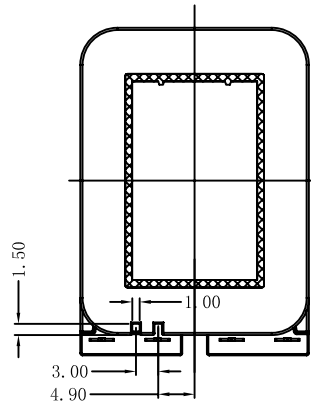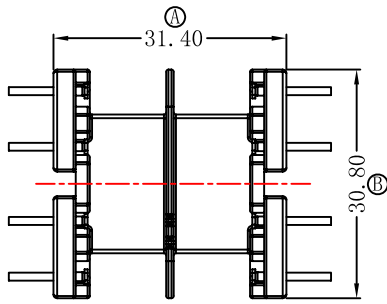

SECTION A-A

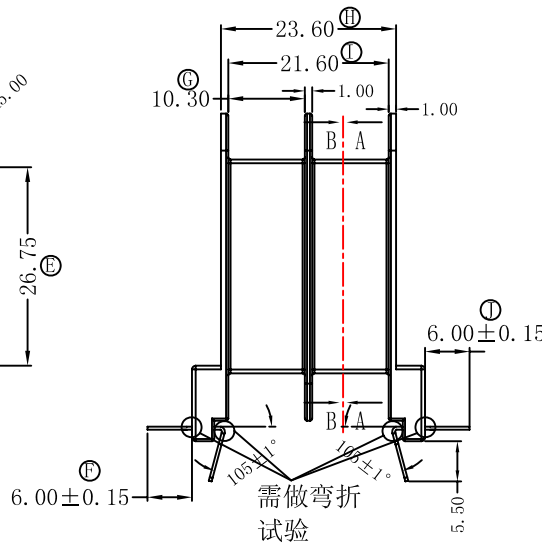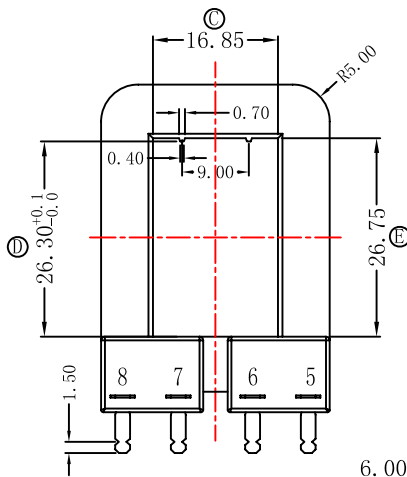

需做弯折试验

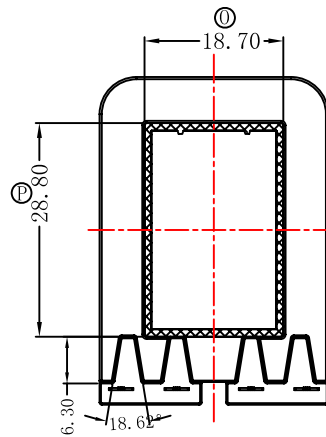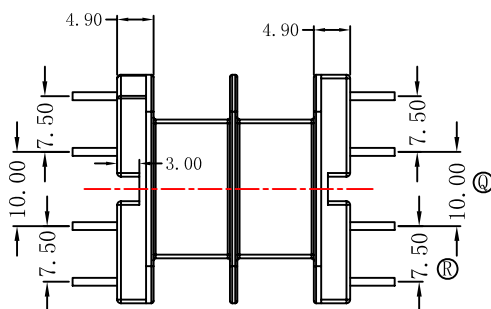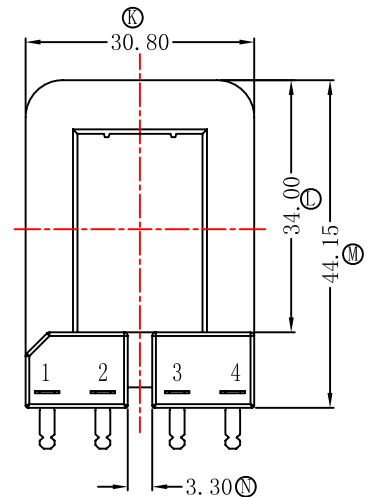

SECTION B-B

REV	DATE	REVISIONS	REC

深圳市捷达成电子有限公司

SHENZHEN JIE DA CHENG ELECTRONICS CO.,LTD.
TEL:0755-27317730 FAX:0755-27317731

ANGLE:
+/-1°

MODEL NAME:
EI-4801 4+4PIN

UNIT:
MM


UL REC:
UL 94V-0

BOBBIN MATERIAL:
PBT

SCALE:
4/1

PIN TENSION LOAD:
1.5KG MIN

PIN MATERIAL:
黄铜 H65 镀锡



DATE:
2017-05-17

DRAWING NO:
EI-4801

REV:
1.0

DRAFTER

L.R.J

TOLERANCE

0<L<4 ±0.1

4<L<16 ±0.2

16<L<50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.